

# SAFES | 2017\_18



SAFES





## SAFES

### EASY TO HIDE SAFES

<b>BASA / DRAWER</b> Pag. 4	<b>GRID</b> Pag. 6	<b>SOCKET</b> Pag. 7	<b>BOX-IN</b> Pag. 8	<b>COVER</b> Pag. 9



### DESKTOP SAFES

<b>PREMIER</b> Pag. 10	<b>HE</b> Pag. 11	<b>HC</b> Pag. 12



### DESKTOP SAFES

<b>SUPRA MOTORIZED</b> Pag. 13	<b>SUPRA Electronic</b> Pag. 14



### DESKTOP SAFES

<b>PLUS-C ELECTR. with Knob</b> Pag. 16	<b>PLUS-C Key</b> Pag. 17	<b>FORZA</b> Pag. 18	<b>TITAN</b> Pag. 19



### WALL SAFES



### WALL SAFES

<b>PREMIER</b> Pag. 20	<b>LOGICA 5</b> Pag. 21	<b>IDEAL 5</b> Pag. 22	<b>SUPRA</b> Pag. 23



**SAFES**

**WALL SAFES**

**WALL SAFES**

**LOGICA 10** Pag. 24 **IDEAL 10** Pag. 25



**PLUS-C ELECTR. with Knob** Pag. 26 **PLUS-C Key** Pag. 27



**FIREPROOF SAFES**

**FIREPROOF SAFES**

**SUPRA** Pag. 28



**RESIST** Pag. 29




**HOTEL**

**STYLO** Pag. 30 **TRAVEL** Pag. 31



**GUN SAFES**

**BRACO** Pag. 32 **GOLDEN** Pag. 34 **WOOD** Pag. 36 **POINTER** Pag. 37

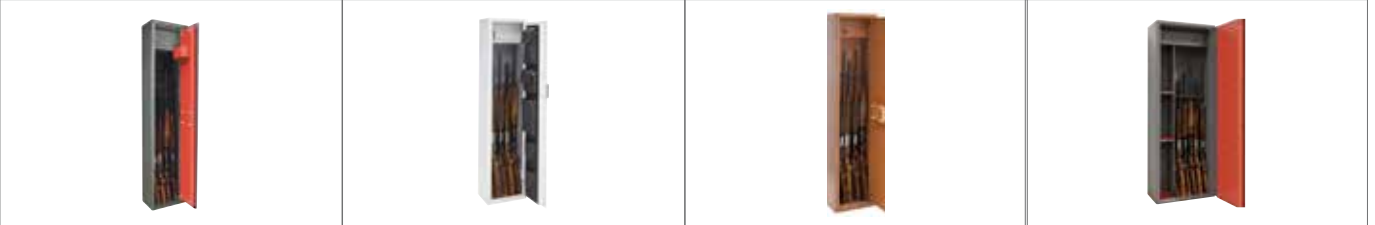

**CPP01** Pag. 37



## BASA

FOR WARDROBE BASES



### TECHNICAL SPECIFICATION

Anti-drill protection:	-
Emergency key	✓ (Ref.20000-S7)
Screen	✓ 6 digits (Ref.20000-S7)
Opening codes:	2 (Ref.20000-S7)
Master function:	✓ (Ref.20000-S7)
Number of combinations:	1 million, between 3 and 6 digits (Ref.20000-S7)
Time-Delay	-
Automatic system block	✓ (Ref.20000-S7)
Internal light	✓ (Ref.20000-S7)
EAN13 code	<b>8425181</b> *
EXTRA	Suitable to hide in the base of wardrobes.



Ref. 20000-S7

Ref. 20000-S7K

OPENING	ELECTRONIC MOTORIZED	KEY
Reference	20000-S7	20000-S7K
Exterior measurements (HxWxD)	110x310x380 mm.	110x310x380 mm.
Interior measurements (HxWxD)	90x305x375 mm.	90x305x375 mm.
Weight	7 kg.	6,3 kg.
Volume	11 L.	11 L.
Bolts/diameter	2/ø12 mm.	2/ø12 mm.
EAN13 code	* 718681	* 726921
Packaging measurement (HxWxD)	160x350x420 mm.	130x330x400 mm.



BASA safe is ideal for hiding in the base of wardrobes.



Motorised upwards opening mechanism allows ease of access.



Hidden in the bottom or base of a wardrobe, the BASA safe is unnoticeable.

## BASA DRAWER

FOR THE FLOOR

TL

### TECHNICAL SPECIFICATION

Colour:	Black
Anchoring:	Fixing holes in the base and sides.
Note:	Custom-made for the Basa safe model.
Installation:	Chest should be installed with the lid plumb to floor level. Easily hidden beneath a rug, carpet or secondary piece of furniture.
EAN13 code	<b>8425181</b> *

- EXTRA
- Allows BASA safe to be hidden under the floor.
  - The lid camouflages and protects the safe meaning the floor space can be used as normal.



Ref. 20000-S7C

REFERENCE	20000-S7C
Exterior measurements (HxWxD)	125x316x386 mm.
Interior measurements (HxWxD)	110x310x380 mm.
Weight	4 kg.
Volume	13 L.
Bolts / diameter	-
EAN13 code	* 721254
Packaging measurement (HxWxD)	146x340x410 mm.



The pre-drilled holes mean metal chest can be fixed to both the floor and the safe.



The metal lid camouflages and protects the safe.



The chest facilitates the installation of the safe in the floor and can be hidden beneath a rug, carpet or secondary piece of furniture.

## GRID

### BUILT-IN WALL BEHIND AN AIR VENT



#### TECHNICAL SPECIFICATION

Colour:	Black
Fitting:	Safe should be fitted to appear fixed to wall.
Opening:	Dimple key
EAN13 code	<b>8425181</b> *
Wall safe specially designed to be camouflaged behind false air vent which is attached to the front of the safe. Requires works in order to install it.	



Ref. 13000W-S0



Ref. 13000W-S1



OPENING	KEY	KEY
Reference	13000W-S0	13000W-S1
Exterior measurements (HxWxD)	200x200x130 mm.	200x400x130 mm.
Interior measurements (HxWxD)	198x170x127 mm.	198x370x127 mm.
Weight	4,5 kg.	7,5 kg.
Volume	6 L.	12 L.
EAN13 code	* 721568	* 726884
Packaging measurement (HxWxD)	210x210x170 mm.	210x410x170 mm.



Lock is exposed once the security vent has been removed.



Storage capacity for small-sized objects.



Dimple key opening system.



Easily hidden in any corner of the house or building.

## SOCKET

BUILT-IN WITHIN THE WALL BEHIND THE SOCKETS



### TECHNICAL SPECIFICATION



Colour:	Black
Fitting:	The box must be installed so that the plugs plate is sunk within the wall. The plugs are fixed by magnets.
Opening:	By the means of a drilled key.
EAN13 code	<b>8425181</b> *
Designed for embedded mounting within the wall and hidden behind the plugs plate incorporated in its front part. It requires work for its mounting.	



Ref. 23000W-S2



Ref. 23000W-S1



OPENING	KEY	KEY
Reference	23000W-S2	23000W-S1
Exterior measurements (HxWxD)	350x400x130 mm.	200x400x130 mm.
Interior measurements (HxWxD)	348x370x127 mm.	198x370x127 mm.
Weight	10 kg.	7,5 kg.
Volume	15 L.	12 L.
EAN13 code	* 731857	* 731840
Packaging measurement (HxWxD)	360x410x150 mm.	210x410x150 mm.



Removing the sockets, we can access the safe lock.



Opening system with a drilled key.



Can be hidden in any corner of the house or building.

## BOX-IN

### FOR KITCHEN PLINTHS



#### TECHNICAL SPECIFICATION

Colour:	Black
Anchoring:	Incorporates a special fastening system.
Opening:	Dimple key.
EAN13 code	<b>8425181</b> *
EXTRA It has a fastening system at the base of the wardrobe, easy to install and very safe.	



Ref. 22000-S1



Ref. 22100-S1

OPENING	KEY	KEY
Reference	22000-S1	22100-S1
Exterior measurements (HxWxD)	98x410x450 mm.	148x410x450 mm.
Interior measurements (HxWxD)	85x378x380 mm.	135x378x380 mm.
Weight	8,5 kg.	10 kg.
Volume	12 L.	19 L.
Bolts	1 of 200x20 mm.	1 of 200x20 mm.
Bolts position		
EAN13 code	* 726938	* 726945
Packaging measurement (HxWxD)	100x420x470 mm.	150x420x470 mm.



Dimple key opening system.



The safe has a flat bolt of 200x20 mm.



Fastening system at the base of the wardrobe, easy to install and very safe.



Appropriated format in order to hide it behind the kitchen plinth.



## COVER



FOR THE BOTTOM OF WARDROBES



Ref.172160

### TECHNICAL SPECIFICATION

Anti-drill protection	-
Type of lock	Electronic
Emergency key	✓
Screen	✓ 6 digits
Opening codes:	2
Master function:	✓
Number of combinations	1 million, between 3 and 6 digits
Time-Delay	-
Automatic system block	✓
Internal light	✓
EAN13 code	<b>8425181</b> *
EXTRA	Suitable for hiding in the false bottom of a wardrobe.

OPENING	ELECTRONIC WITH KNOB
Reference	172160
Exterior measurements (HxWxD)	350x350x150 mm.
Interior measurements (HxWxD)	346x346x90 mm.
Weight	10 kg.
Volume	11 L.
Bolts	2/ø20 mm.
EAN13 code	*  733387
Packaging measurement (HxWxD)	370x370x170 mm.



Ideal for hiding in the false bottom of a wardrobe.

## PREMIER

FRONTAL THICKNESS

3 mm.

TL




NEW

### TECHNICAL SPECIFICATION

Anti-drill protection	-
Type of lock	Electronic
Emergency key	✓
Opening codes:	1
Master function:	-
Screen	-
Number of combinations	100 millions, between 3 and 8 digits
Time-Delay	-
Automatic system block	✓
Internal light	-
EAN13 code	8425181 *



PREMIER  
Ref. 16501-S2



OPENING	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB
Reference	16501-S0	16501-S1	16501-S2
Exterior measurements (HxWxD)	170x230x170 mm.	200x310x200 mm.	250x350x250 mm.
Interior measurements (HxWxD)	165x225x115 mm.	195x305x145 mm.	245x345x195 mm.
Weight	3,7kg.	5kg.	6,8kg.
Volume	4 L.	9 L.	16 L.
Thickness (front / casing)	3 mm. / 1,5 mm.	3 mm. / 1,5 mm.	3 mm. / 1,5 mm.
Shelf	-	-	-
Bolts/diameter	2/Ø16 mm.	2/Ø16 mm.	2/Ø20 mm.
Bolts position			
EAN13 code	* 734391	* 734407	* 731598
Packaging measurement (HxWxD)	190x250x190 mm.	225x335x220 mm.	270x370x270 mm.



Two bolts at different heights ensure the door.



It has an emergency key to open the safe in case of forgetting the secret code or if it runs out of batteries.




**HE**

FRONTAL THICKNESS

**4**  
mm.



**TECHNICAL SPECIFICATION**



Anti-drill protection	-
Type of lock	Electronic
Emergency key	✓
Opening codes:	2
Master function:	✓
Screen	-
Number of combinations	100 millions, between 3 and 8 digits
Time-Delay	-
Automatic system block	✓
Internal light	-
EAN13 code	<b>8019635</b> * 





**HE/0**  
Ref. HE/0



162x15 mm. slot allows documents or notes to be deposited, without having to open the safe.



OPENING	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB
Reference	HE/0	HE/0 CASH
Exterior measurements (HxWxD)	170x230x170 mm.	170x230x170 mm.
Interior measurements (HxWxD)	164x224x130 mm.	164x224x130 mm.
Weight	6,3 kg.	6,3 kg.
Volume	5 L.	5 L.
Thickness (front / casing)	4 mm. / 2 mm.	4 mm. / 2 mm.
Shelf	-	-
Bolts/diameter	2/Ø16 mm.	2/Ø16 mm.
Bolts position		
EAN13 code	* 023102	* 023300
Packaging measurement (HxWxD)	185x245x185	185x245x185



HE/0 CASH



Rotary locking bolts avert any intent at cutting from outside.

FRONTAL THICKNESS

HC

4 mm.





### TECHNICAL SPECIFICATION

Anti-drill protection	-
Type of lock	Double-bitted key
Emergency key	-
Opening codes	-
Master function	-
Screen	-
Number of combinations:	-
Time-Delay	-
Automatic system block	-
Internal light	-
EAN13 code	<b>8019635</b> *



HC/0  
Ref. HC/0



OPENING	KEY	KEY
Reference	HC/0	HC/1
Exterior measurements (HxWxD)	170x230x170 mm.	200x310x200 mm.
Interior measurements (HxWxD)	164x224x130 mm.	194x304x145 mm.
Weight	6,1kg.	10,1kg.
Volume	5 L.	8 L.
Thickness (front / casing)	4 mm. / 2 mm.	4 mm. / 2 mm.
Shelf	-	-
Bolts/diameter	2/Ø18 mm.	2/Ø18 mm.
Bolts position		
EAN13 code	* 022105	* 022112
Packaging measurement (HxWxD)	185x245x185	230x320x220



Opening with double-bitted key.

**SUPRA**

FRONTAL THICKNESS

**6**  
mm.

**NEW**




**TECHNICAL SPECIFICATION**

Anti-drill protection	-
Type of lock	Electronic
Emergency key	✓
Screen	✓ 6 digits
Opening codes	2
Master function	✓
Number of combinations:	1 million, between 3 and 6 digits
Time-Delay	-
Automatic system block	✓
Internal light	✓
EAN13 code	<b>8425181</b> *



**SUPRA**  
Ref. 240160



OPENING	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB
Reference	240110	240120	240160
Exterior measurements (HxWxD)	200x310x200 mm.	250x350x250 mm.	380x350x360 mm.
Interior measurements (HxWxD)	195x305x140 mm.	245x345x190 mm.	375x345x300 mm.
Weight	7,5 kg.	10,5 kg.	17 kg.
Volume	8 L.	16 L.	39 L.
Thickness (front / casing)	6 mm. / 2 mm.	6 mm. / 2 mm.	6 mm. / 2 mm.
Shelf	x	x	1
Bolts/diameter	2/ø20 mm.	2/ø20 mm.	2/ø20 mm.
Bolts position			
EAN13 code	* 733349	* 731673	* 731697
Packaging measurement (HxWxD)	270x370x270 mm.	270x370x270 mm.	400x370x380 mm.



Ref. SUPRA 240120



Rotary locking bolts avert any intent at cutting from the outside.



Internal light.

## SUPRA MOTORIZED

FRONTAL THICKNESS

6 mm.

**NEW**



### TECHNICAL SPECIFICATION

Anti-drill protection	-
Emergency key	✓
Screen	✓ 6 digits
Opening codes	2
Master function	✓
Number of combinations:	1 million, between 3 and 6 digits
Time-Delay	-
Automatic system block	✓
Internal light	✓
EAN13 code	<b>8425181</b> *



**SUPRA**  
Ref. 240220

OPENING	MOTORIZED
Reference	240220
Exterior measurements (HxWxD)	250x350x250 mm.
Interior measurements (HxWxD)	245x345x190 mm.
Weight	10,5 kg.
Volume	16 L.
Thickness (front / casing)	6 mm. / 2 mm.
Shelf	x
Bolts/diameter	2/ø20 mm.
Bolts position	
EAN13 code	* 732670
Packaging measurement (HxWxD)	270x370x270 mm.



It has an emergency key to open the safe in case of forgetting the secret code or if it runs out of batteries.

## PLUS-C

FRONTAL THICKNESS

**10+3** mm.  
Anti-drilling  
steel

**NEW**




### TECHNICAL SPECIFICATION

Anti-drill protection	✓
Type of lock	Electronic
Emergency key	✓
Screen	✓ 8 digits
Opening codes	2
Master function	✓
Number of combinations:	100 millions between 3 and 8 digits
Time-Delay	✓
Automatic system block	✓
Internal light	✓
EAN13 code	<b>8425181</b> *



**PLUS-C**  
Ref.180150

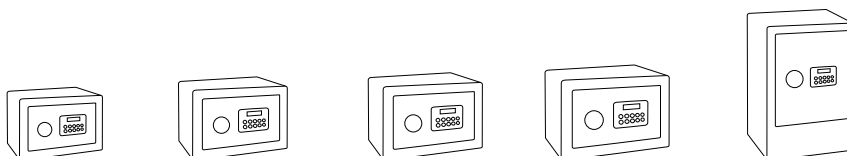

OPENING	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB
Reference	180110	180120	180140	180150	180190
Exterior measurements (HxWxD)	200x310x200 mm.	250x350x250 mm.	270x385x300 mm.	320x420x360 mm.	620x385x360 mm.
Interior measurements (HxWxD)	190x300x139 mm.	240x340x189 mm.	260x375x239 mm.	310x410x299 mm.	610x375x299 mm.
Weight	16,8 kg.	24,9 kg.	32 kg.	42,4 kg.	58,3 kg.
Volume	8 L.	15 L.	23 L.	38 L.	68 L.
Thickness (front / casing)	10+3 mm. / 5 mm.	10+3 mm. / 5 mm.	10+3 mm. / 5 mm.	10+3 mm. / 5 mm.	10+3 mm. / 5 mm.
Shelf	-	1	1	1	1
Bolts/diameter	2/ø22 mm.	2/ø22 mm.	6/ø22 mm.	7/ø22 mm.	7/ø22 mm.
Bolts position					
EAN13 code	* 734698	* 734605	* 734612	* 734629	* 734650
Packaging measurement (HxWxD)	215x330x250mm.	265x370x300mm.	285x405x350mm.	335x440x410mm.	635x405x410mm.



The internal bolts housing averts any adverse attempt at lever action.



External power socket micro USB type.



**PLUS-C**

FRONTAL THICKNESS


**10+3** mm.  
Anti-drilling steel

Class S2 certified, according to EN14450 European Standard

**NEW**



**TECHNICAL SPECIFICATION**






Anti-drill protection	✓
Type of lock	EN1300 CLASS A
Emergency key	-
Screen	-
Opening codes	-
Master function	-
Number of combinations:	-
Time-Delay	-
Automatic system block	-
Internal light	-
EAN13 code	<b>8425181</b> * 






**EXTRA**

• Being a CERTIFIED LOCK, the duplicate of keys can only be done by a Technical Assistance Service authorized by ARREGUI. It is necessary to prove the ownership of the safe and present an original key.



**PLUS-C**  
Ref.180340



OPENING	KEY	KEY	KEY	KEY	KEY
Reference	180310	180320	180340	180350	180390
Exterior measurements (HxWxD)	200x310x200 mm.	250x350x250 mm.	270x385x300 mm.	320x420x360 mm.	620x385x360 mm.
Interior measurements (HxWxD)	190x300x139 mm.	240x340x189 mm.	260x375x239 mm.	310x410x299 mm.	610x375x299 mm.
Weight	16,9 kg.	24,9 kg.	32,6 kg.	42,6 kg.	66,5 kg.
Volume	8 L.	15 L.	23 L.	38 L.	68 L.
Thickness (front / casing)	10+3 mm. / 5 mm.	10+3 mm. / 5 mm.	10+3 mm. / 5 mm.	10+3 mm. / 5 mm.	10+3 mm. / 5 mm.
Shelf	-	1	1	1	1
Bolts/diameter	2/ø22 mm.	2/ø22 mm.	6/ø22 mm.	7/ø22 mm.	7/ø22 mm.
Bolts position					
EAN13 code	* 734582	* 733578	* 733479	* 733486	* 734599
Packaging measurement (HxWxD)	215x330x250mm.	265x370x300mm.	285x405x350mm.	335x440x410mm.	635x405x410mm.



Certified lock EN1300 Class A.



Rotary locking bolts avert any intent at cutting from the outside.





## FORZA

FRONTAL THICKNESS

70 mm.



### TECHNICAL SPECIFICATION

Anti-drill protection	✓
Type of lock	Electronic, EN1300 Class A
Emergency key	-
Screen	-
Opening codes	2
Master function	✓
Number of combinations:	1 million, between 6 and 8 digits
Time-Delay	✓
Automatic system block	✓
Internal light	-
EAN13 code	8425181 *

#### EXTRA

- Perimeter closing, with bolts on the 3 sides and fixed plates that enter inside the body of the safe.
- Internal housing for the bolts which ensure the door.
- External power socket, with direct application of a 9V battery.



Class S2 certified, according to EN14450 European Standard



**FORZA**  
Ref.42270

OPENING	ELECTRONIC WITH KNOB
Reference	42270
Exterior measurements (HxWxD)	1000x445x400 mm.
Interior measurements (HxWxD)	920x365x296 mm.
Weight	65 kg.
Volume	99 L.
Thickness (front / casing)	70 mm. / 40 mm.
Shelf	2
Bolts/diameter	6/ø19 mm.
Bolts position	
EAN13 code	* 727997
Packaging measurement (HxWxD)	1000x580x520 mm.



Perimeter closing with bolts on the 3 sides.



Interior tray adjustable in height.



CLASS S2 Certified, according to EN14450 European Standard.

## TITAN

FRONTAL THICKNESS

50 mm.



EUROGRADE III – TESTED TO EUROPEAN STANDARD EN-1143-1

### TECHNICAL SPECIFICATION

Anti-drill protection	✓
Type of lock	Electronic of high security. VDS Class 2 EN1300 Class B
Emergency key	-
Opening codes	2
Master function	✓
Number of combinations:	1 million, 6 digits
Time-Delay	✓
Automatic system block	✓
EAN13 code	<b>8425181</b> *

#### EXTRAS

- Perimeter closing with 5 bolts::
  - 3 mobile bolts
    - 2 of 220x38x12 mm.
    - 1 of 145x38x12 mm.
  - 2 permanent bolts.
- Anti-lever safety: internal bolts housing averts any adverse attempt at lever action.
- Re-blocking system: it prevents the safe from opening in case of a violent blow to the opening elements.
- Opening delay: programmable delay up to 99 minutes.
- The hinges allow an opening up to 180° and a maximum exploitation of the internal space.
- It exceeds the minimum weight required by the insurance companies.
- Anchoring: 2 fixing holes in the base.



TITAN Ref.12300-S1

OPENING	ELECTRONIC
Reference	12300-S1
Exterior measurements (HxWxD)	300x400x300 mm.
Interior measurements (HxWxD)	200x300x175 mm.
Weight	105 kg.
Volume	10,5 L.
Thickness (front / casing)	50 mm. / 75 mm.
Shelf	1
Bolts/diameter	8
Bolts position	
EAN13 code	* 723401
Packaging measurement (HxWxD)	325x440x400 mm.



Capacity for 3 short weapons.



## PREMIER

FRONTAL THICKNESS

3 mm.





**NEW**

### TECHNICAL SPECIFICATION

Anti-drill protection	-
Type of lock	Electronic
Emergency key	✓
Screen	-
Opening codes	1
Master function	-
Number of combinations:	100 millions between 3 and 8 digits
Time-Delay	-
Automatic system block	✓
Internal light	-
EAN13 code	8425181 *



**PREMIER**  
Ref. 16501W-S0



OPENING	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB
Reference	16501W-S0	16501W-S1
Exterior measurements (HxWxD)	190x250x150 mm.	210x320x200 mm.
Interior measurements (HxWxD)	165x225x90 mm.	185x295x140 mm.
Weight	3,7 kg.	5 kg.
Volume	4 L.	8 L.
Thickness (front / casing)	3 mm. / 1,2 mm.	3 mm. / 1,2 mm.
Shelf	-	-
Bolts/diameter	2/Ø16 mm	2/Ø16 mm
Bolts position		
EAN13 code	* 731604	* 731611
Packaging measurement (HxWxD)	210x270x170 mm.	230x340x220 mm.



It has an emergency key to open the safe in case of forgetting the secret code or if it runs out of batteries.



Two bolts at different heights ensure the door.

## LOGICA 5

FRONTAL THICKNESS

5 mm.




### TECHNICAL SPECIFICATION

Anti-drill protection	-
Type of lock	Electronic
Emergency key	✓
Screen	-
Opening codes	2
Master function	✓
Number of combinations:	10.000 millions between 4 and 10 digits
Time-Delay	-
Automatic system block	✓
Internal light	-
EAN13 code	8019635 *




LOGICA 5  
Ref. BE/5P



OPENING	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB
Reference	BE/2	BE/2P	BE/3	BE/3P	BE/4P	BE/5P
Exterior measurements (HxWxD) mm.	230x350x150	230x350x200	280x380x150	280x380x200	300x410x200	340x460x200
Interior measurements (HxWxD) mm.	205x320x110	205x320x160	255x350x110	255x350x160	275x380x160	315x430x160
Weight	10,1 kg.	11,4 kg.	12,9 kg.	13,5 kg.	15,1 kg.	18,1 kg.
Volume	7 L.	10 L.	10 L.	14 L.	17 L.	22 L.
Thickness (front / casing)	5/2 mm.	5/2 mm.	5/2 mm.	5/2 mm.	5/2 mm.	5/2 mm.
Shelf	1	1	1	1	1	1
Bolts/diameter	2/Ø18	2/Ø18	2/Ø20	2/Ø20	2/Ø20	2/Ø20
Bolts position						
EAN13 code	* 001209	* 001216	* 001308	* 001315	* 001414	* 001513
Packaging measurement (HxWxD) mm.	250x355x170	250x360x220	300x390x170	300x390x225	325x410x225	365x475x220



Two bolts at different heights ensure the door.

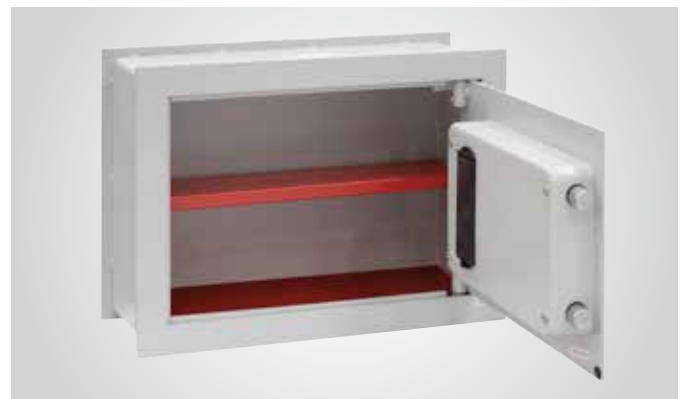

Internal shelf.



## IDEAL 5

FRONTAL THICKNESS

5 mm.




### TECHNICAL SPECIFICATION

Anti-drill protection:	-
Type of lock	Double-bitted lock
Emergency key	-
Screen	-
Opening codes:	-
Master function:	-
Number of combinations:	-
Time-Delay	-
Automatic system block	-
Internal light	-
EAN13 code	<b>8019635</b> *




**IDEAL 5**  
Ref. BC/2



OPENING	KEY	KEY	KEY	KEY	KEY	KEY	KEY	KEY
Reference	BC/0	BC/1	BC/1P	BC/2	BC/2P	BC/3P	BC/4P	BC/5P
Exterior measurements (HxWxD) mm.	180x260x150	200x300x150	200x300x200	230x350x150	230x350x200	280x380x200	300x410x200	340x460x200
Interior measurements (HxWxD) mm.	155x230x110	175x270x110	175x270x160	205x320x110	205x320x160	255x350x160	275x380x160	315x430x160
Weight	6,3 kg.	7,8 kg.	8,9 kg.	9,4 kg.	10,5 kg.	13,2 kg.	14,3 kg.	17,2 kg.
Volume	4L.	5L.	7L.	7L.	10L.	14L.	17L.	22L.
Thickness (front / casing)	5/2 mm.	5/2 mm.	5/2 mm.	5/2 mm.	5/2 mm.	5/2 mm.	5/2 mm.	5/2 mm.
Shelf	1	1	1	1	1	1	1	1
Bolts/diameter (mm.)	2/Ø18	2/Ø18	2/Ø18	2/Ø18	2/Ø18	2/Ø18	2/Ø18	2/Ø18
Bolts position								
EAN13 code	* 000004	* 000103	* 000110	* 000202	* 000219	* 000318	* 000417	* 000516
Packaging measurement (HxWxD) mm.	205x275x170	225x310x170	225x315x220	250x365x170	255x360x215	305x390x215	320x420x220	360x470x220



Two bolts at different heights ensure the door.

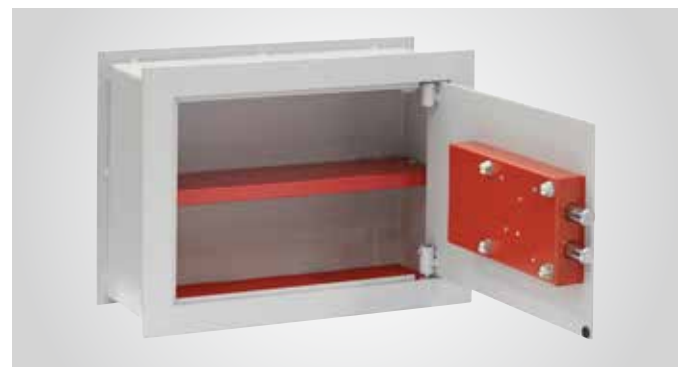


Internal shelf.

**SUPRA**

FRONTAL THICKNESS

**6**  
mm.

ADJUSTABLE DEPTH



**NEW**






**TECHNICAL SPECIFICATION**


Anti-drill protection:	-
Type of lock	Electronic
Emergency key	✓
Screen	✓ 6 digits
Opening codes:	2
Master function:	✓
Number of combinations:	1 million, between 3 and 6 digits
Time-Delay	-
Automatic system block	✓
Internal light	✓
EAN13 code	<b>8425181</b> *
EXTRA Adjustable depth, 5 positions each 25 mm.. (150 / 175 / 200 / 225 / 250 mm).	



**SUPRA**  
Ref. 241110



OPENING	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB
Reference	241110	241120	241150
Exterior measurements (HxWxD)	210x320x150/250 mm.	260x360x150/250 mm.	320x420x150/250 mm.
Interior measurements (HxWxD)	190x300x90/190 mm.	240x340x90/190 mm.	300x400x90/190 mm.
Weight	7,4 kg.	8,4 kg.	13 kg.
Volume	5-11 L.	7-16 L.	11-23 L.
Thickness (front / casing)	6 mm. / 2 mm.	6 mm. / 2 mm.	6 mm. / 2 mm.
Shelf	-	-	-
Bolts/diameter	2/ø20 mm.	2/ø20 mm.	2/ø20 mm.
Bolts position			
EAN13 code	* 731666	* 731680	* 733363
Packaging measurement (HxWxD)	230x340x170 mm.	280x380x170 mm.	340x440x170 mm.

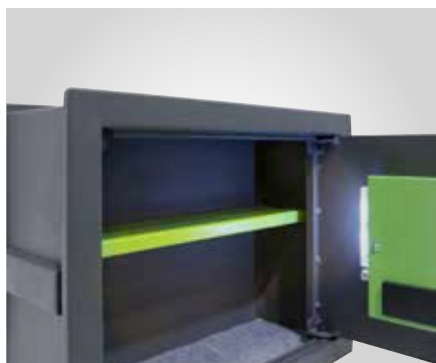

Internal light.



Rotary locking bolts avert any intent at cutting from the outside.



Adjustable depth, 5 positions each 25 mm.

## LOGICA 10

FRONTAL THICKNESS

10  
mm.




### TECHNICAL SPECIFICATION

Anti-drill protection:	✓
Type of lock:	Electronic
Emergency key	✓
Screen	-
Opening codes:	2
Master function:	✓
Number of combination:	10.000 millions, between 4 and 10 digits
Time-Delay	-
Automatic system block	✓
Internal light	-
EAN13 code	8019635 *



LOGICA 10  
Ref. DL/3



OPENING	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB
Reference	DL /2	DL/3	DL/4	DL/5	DL/6	DL/7
Exterior measurements (HxWxD) mm.	230X350X200	280X380X200	300X410X200	340X460X200	420X460X220	520X360X220
Interior measurements (HxWxD)	205x325x145	255X355X145	385X275X145	315X435X145	395X435X165	495X335X165
Weight	13,5 kg.	16,5 kg.	20,4 kg.	25,1 kg.	31,1 kg.	29,8 kg.
Volume	10 L.	13 L.	15 L.	20 L.	28 L.	27 L.
Thickness (front / casing) mm.	10 /2,5	10 /2,5	10 /2,5	10 /2,5	10 /2,5	10 /2,5
Shelf	1	1	1	1	1	1
Bolts/diameter (mm.)	2/Ø22	2/Ø22	4/Ø22	5/Ø22	5/Ø22	5/Ø22
Bolts position						
EAN13 code	* 006204	* 006303	* 006402	* 006501	* 006600	* 071707
Packaging measurement (HxWxD) mm.	260x375x225	310x400x230	330x430x225	370x480x230	440x480x250	550x375x250



Rotary locking bolts avert any intent at cutting from the outside.



Internal shelf.

**IDEAL 10**

FRONTAL THICKNESS

**10**  
mm.


**TL**








**TECHNICAL SPECIFICATION**

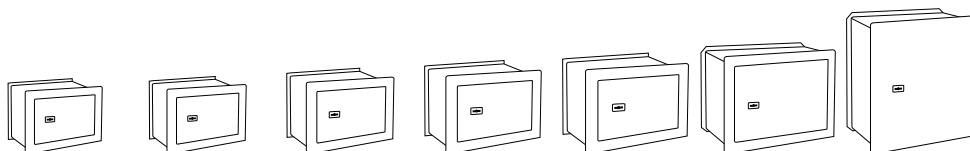Anti-drill protection:	✓
Type of lock:	Double-bitted lock
Emergency key	-
Screen	-
Opening codes:	-
Master function:	-
Number of combination:	-
Time-Delay	-
Automatic system block	-
Internal light	-
EAN13 code	<b>8019635</b> * *



**IDEAL 10**  
Ref. DI/4



OPENING	KEY	KEY	KEY	KEY	KEY	KEY	KEY
Reference	DI /1	DI /2	DI /3	DI /4	DI /5	DI /6	DI /7
Exterior measurements (HxWxD) mm.	200x300x200	230x350x200	280x380x200	300x410x200	340x460x200	420x460x220	520x360x220
Interior measurements (HxWxD) mm.	175x275x130	205x325x145	255x355x145	275x385x145	315x435x145	395x435x165	495x335x165
Weight	10,5 kg.	12,8 kg.	16,3 kg.	20,3 kg.	24,1 kg.	29,8 kg.	29,2 kg.
Volume	7 L.	10 L.	13 L.	15 L.	20 L.	28 L.	27 L.
Thickness (front / casing) mm.	10 /1,5	10 /1,5	10 /1,5	10 /1,5	10 /1,5	10 /1,5	10 /1,5
Shelf	1	1	1	1	1	1	1
Bolts/diameter (mm.)	2/Ø22	2/Ø22	2/Ø22	4/Ø22	5/Ø22	5/Ø22	5/Ø22
Bolts position							
EAN13 code	* 004101	* 004200	* 004309	* 004408	* 004507	* 004606	* 070700
Packaging measurement (HxWxD) mm.	230x325x230	260x375x225	305x405x230	330x430x230	360x480x230	445x490x250	550x380x245



Ref. DI/2



Rotary locking bolts avert any intent at cutting from the outside.



Internal shelf.



## PLUS-C

FRONTAL THICKNESS **10+3** mm. Anti-drilling steel

ADJUSTABLE DEPTH




### TECHNICAL SPECIFICATION

Anti-drill protection:	✓
Type of lock	Electronic
Emergency key	✓
Screen	✓ 8 digits
Opening codes:	2
Master function:	✓
Number of combinations:	100 millions, between 3 and 8 digits
Time-Delay	✓
Automatic system block	✓
Internal light	✓
EAN13 code	<b>8425181</b> *


**EXTRA**  
Adjustable depth, 5 positions each 25 mm. (200/225/250/275/300 mm).



**PLUS-C**  
Ref. 181150



OPENING	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB
Reference	181110	181120	181140	181150	181180
Exterior measurements (HxWxD) mm.	210x320x150/220	260x360x150/220	270x385x200/300	320x420x200/300	520x385x200/300
Interior measurements (HxWxD) mm.	170x280x92/162	220x320x92/162	230x345x142/242	280x380x142/242	480x345x142/242
Weight	12,5 kg.	16,4 kg.	21,6 kg.	26,2 kg.	36 kg.
Volume	4-8 L.	6-11 L.	11-19 L.	15-26 L.	24-40 L.
Thickness (front / casing)	10+3 mm. / 2 mm.	10+3 mm. / 2 mm.	10+3 mm. / 2 mm.	10+3 mm. / 2 mm.	10+3 mm. / 2 mm.
Shelf	-	1	1	1	1
Bolts/diameter	2/ø22 mm.	2/ø22 mm.	6/ø22 mm.	7/ø22 mm.	7/ø22 mm.
Bolts position					
EAN13 code	* 734636	* 734643	* 734667	* 734674	* 734681
Packaging measurement (HxWxD) mm.	225x340x200	275x380x200	285x405x250	335x440x250	535x405x250

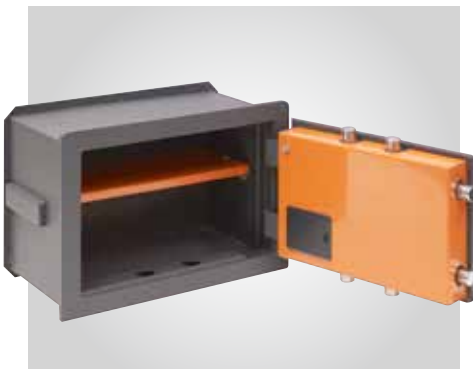

Rotary locking bolts avert any intent at cutting from the outside. Internal bolts housing.



External power socket micro USB type.



Adjustable depth, 5 positions each 25 mm.

**PLUS-C**

FRONTAL THICKNESS **10+3** mm. Anti-drilling steel

ADJUSTABLE DEPTH

Class S2 certified, according to EN14450 European Standard

**NEW**

**TECHNICAL SPECIFICATION**


Anti-drill protection:	<input checked="" type="checkbox"/>
Type of lock	Double bitted certified EN1300 Class A
Emergency key	-
Screen	-
Opening codes:	-
Master function:	-
Number of combinations:	-
Time-Delay	-
Automatic system block	-
Internal light	-
EAN13 code	<b>8425181</b>

**EXTRA**

- Adjustable depth, 5 positions each 25 mm. (200/225/250/275/300 mm).
- Being a CERTIFIED LOCK, the duplicate of keys can only be done by a Technical Assistance Service authorized by ARREGUI. It is necessary to prove the ownership of the safe and present an original key.



**PLUS-C**  
Ref.181310

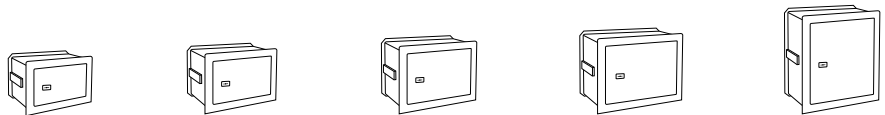

OPENING	KEY	KEY	KEY	KEY	KEY
Reference	181310	181320	181340	181350	181380
Exterior measurements (HxWxD) mm.	210x320x150/220	260x360x150/220	270x385x200/300	320x420x200/300	520x385x200/300
Interior measurements (HxWxD) mm.	170x280x92/162	220x320x92/162	230x345x142/242	280x380x142/242	480x345x142/242
Weight	12,5 kg.	16,5 kg	17,3 kg	21,3 kg.	35,8 kg.
Volume	4-8 L.	6-11 L.	11-19 L.	15-26 L.	24-40 L.
Thickness (front / casing) mm.	10+3 / 2	10+3 / 2	10+3 / 2	10+3 / 2	10+3 / 2
Shelf	-	1	1	1	1
Bolts/diameter	2/ø22 mm.	2/ø22 mm.	6/ø22 mm.	7/ø22 mm.	7/ø22 mm.
Bolts position					
EAN13 code	733554	733561	733516	733523	733547
Packaging measurement (HxWxD) mm.	225x340x200	275x380x200	285x405x250	335x440x250	535x405x250



Certified lock EN1300 Class A



Rotary locking bolts avert any intent at cutting from the outside.



Adjustable depth, 5 positions each 25 mm.

## SUPRA

FRONTAL THICKNESS

6 mm.



NEW



### TECHNICAL SPECIFICATION

Anti-drill protection:	-
Fire resistance:	✓
Type of lock:	Electronic
Emergency key	✓
Screen	✓ 6 digits
Opening codes:	2
Master function:	✓
Number of combinations:	1 million, between 3 and 6 digits
Time-Delay	-
Automatic system block	✓
Internal light	-
EAN13 code	<b>8425181</b> *

#### EXTRA


It bears an outside temperature of 600°C for 30 minutes, without the internal temperature exceeding 170° (the paper decomposes at 177°)



SUPRA  
Ref. 240140-IG



OPENING	ELECTRONIC WITH KNOB
Reference	240140-IG
Exterior measurements (HxWxD)	280x380x345 mm.
Interior measurements (HxWxD)	195x295x240 mm.
Weight	19,8 Kg.
Volume	15 L.
Thickness (front / casing)	6 mm. / 40 mm.
Shelf	-
Bolts/diameter	2/ø20 mm.
Bolts position	
EAN13 code	* 735275
Packaging measurement (HxWxD)	320x420x385 mm.

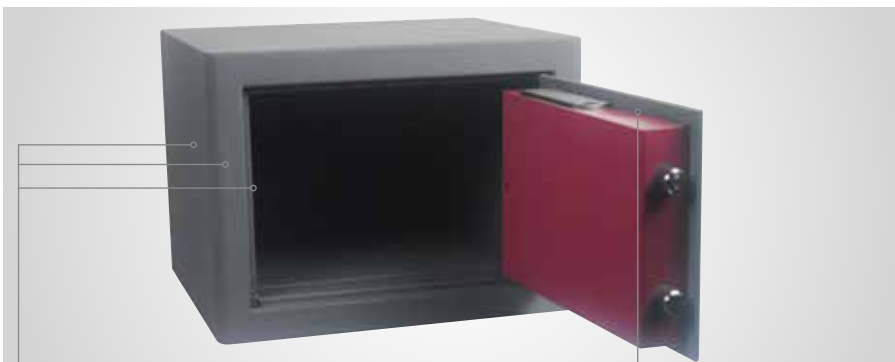

2 mm. + 2 mm. + 36 mm. of steel filled with fireproof material.

Gaskets made of fireproof material.



Rotary locking bolts avert any intent at cutting from the outside.

## RESIST

FRONTAL THICKNESS

98 mm.



LFS 60P, according to EN15659 European Standard



NEW



### TECHNICAL SPECIFICATION

Anti-drill protection:	-
Fire resistance:	✓
Type of lock:	Electronic
Emergency key	-
Screen	-
Opening codes:	2
Master function:	✓
Number of combinations:	1 million, between 4 and 6 digits
Time-Delay	-
Automatic system block	✓
Internal light	-
EAN13 code	8425181 *

- Maintains an interior temperature below 170°C during 60 minutes (paper decomposes from 177°C)
- Ref. 41160 and 41170 include an interior coffer with key.



RESIST Ref. 41140



OPENING	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB
Reference	41120	41140	41160	41170
Exterior measurements (HxWxD)	315x445x425 mm.	510x445x425 mm.	792x485x450 mm.	972x565x450 mm.
Interior measurements (HxWxD)	207x341x296 mm.	402x341x296 mm.	607x346x301 mm.	786x426x301 mm.
Weight	38 kg.	54 kg.	103 kg.	138 kg.
Volume	21 L.	41 L.	64/8 L.	98/10 L.
Thickness (front / casing)	98 mm. / 52 mm.	98 mm. / 52 mm.	98 mm. / 52 mm.	98 mm. / 52 mm.
Shelf	x	1	1	1
Bolts/diameter	2/ø14 mm.	2/ø14 mm.	3/ø24 mm.	5/ø24 mm.
Bolts position				
EAN13 code	* 726082	* 726099	* 727065	* 727072
Packaging measurement (HxWxD) mm.	335x470x480	520x475x450	820x530x510	990x580x520



Batteries holder housed outside, beneath the keyboard.



Fire resistant, according to EN15659 European Standard.



Include an extractible tray housed on the top of the safe.

## STYLO



FRONTAL THICKNESS

3 mm.

**NEW**

### TECHNICAL SPECIFICATION





Anti-drill protection:	-
Emergency key	✓
Opening codes:	2
Master function:	✓
Number of combinations:	100 millions, between 3 and 8 digits
Time-Delay	-
Automatic system block	✓
Internal light	-
EAN13 code	<b>8425181</b> *

**EXTRA:**

- A protective system anti-lock pick which prevents its handling from outside.
- OPTIONAL: Ref. 19000S3 and 19000S4 include the option of a rental key



**STYLO**  
Ref. 19000-S4



OPENING	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB	ELECTRONIC WITH KNOB
Reference	19000-S1	19000-S2	19000-S3	19000-S4
Exterior measurements (HxWxD)	200x310x200 mm.	250x350x250 mm.	200x430x350 mm.	200x457x404 mm.
Interior measurements (HxWxD)	185x305x130 mm.	245x345x180 mm.	190x420x300 mm.	190x440x354 mm.
Weight	4,6 kg.	6,2 kg.	8 kg.	8 kg.
Volume	7,5 L.	15,2 L.	24 L.	30 L.
Thickness (front / casing)	3 mm. / 1,2 mm.	3 mm. / 1,2 mm.	3 mm. / 1,2 mm.	3 mm. / 1,2 mm.
Shelf	-	-	-	-
Bolts/diameter	2/ø16 mm.	2/ø20 mm.	2/ø18 mm.	2/ø18 mm.
Bolts position				
EAN13 code	* 726174	* 726181	* 727911	* 727751
Packaging measurement (HxWxD)	220x330x240 mm.	270x390x270 mm.	220x450x395 mm.	220x480x435 mm.



Optional: rental key for 19000-S3 and 19000-S4 models.



Stylo 19000-S2.



Include emergency key.

## TRAVEL

FRONTAL THICKNESS

5 mm.



### TECHNICAL SPECIFICATION


Anti-drill protection:	-
Emergency key	✓
Screen	6 digits
Opening codes:	2
Master function:	✓
Number of combinations:	1 million, between 4 and 6 digits
Time-Delay	-
Automatic system block	✓
Internal light	-
EAN13 code	8425181 *

EXTRA:  
 • Flash-Ram memory: Keeps safe information in case safe run out of batteries.

OPTIONAL:  
 • Rental system with magnetic rod.  
 • Euro-american socket (allows the charge of laptop, ipad, phones.....)



TRAVEL  
Ref. 51300-S3B



OPENING	ELECTRONIC MOTORIZED
Reference	51300-S3B
Exterior measurements (HxWxD)	200x418x381 mm.
Interior measurements (HxWxD)	196x414x326 mm.
Weight	10 kg.
Volume	25 L.
Thickness (front / casing)	5 mm. / 1,5 mm.
Shelf	1
Bolts/diameter	2/ø20 mm.
Bolts position	
EAN13 code	* 731871
Packaging measurement (HxWxD)	220x420x400 mm.



OPTIONAL: Rental system with magnetic rod.



Include emergency key.



FRONTAL THICKNESS

2 mm.

## BRACO RANGE




### TECHNICAL SPECIFICATION

Type of lock	6 asymmetric double bitted, with double blade key.
EAN13 code	8425181 *
EXTRA	
<ul style="list-style-type: none"> <li>Shelves for weapons made of rubber.</li> <li>Drawer with key (ref. ARM050335, ARM070335, ARM100335)</li> </ul>	

**GUN SAFE**  
Ref. ARM050335



- The ARM030325 gun-rack corresponds to the previous model APF.2K.
- The ARM050335 gun-rack corresponds to the previous model APF.4KTADV.

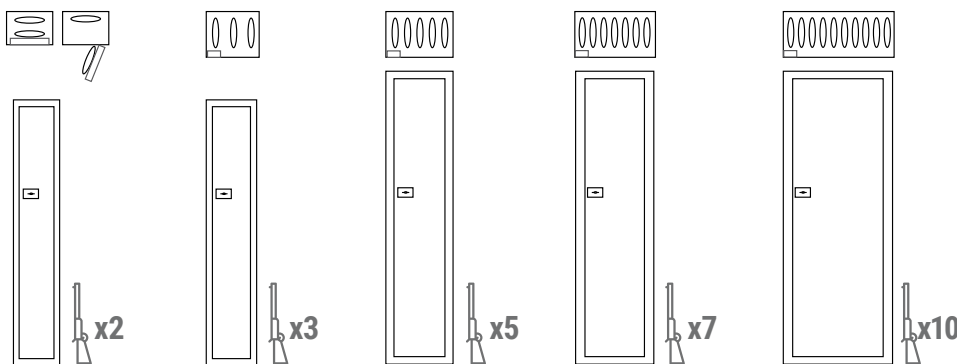

Nº GUNS	2	3	5	7	10
Reference	ARM020325	ARM030325	ARM050335	ARM070335	ARM100335
Opening	Key	Key	Key	Key	Key
Exterior measurements (HxWxD) mm.	1.255x205x150	1.255x245x205	1.380x315x205	1.380x370x205	1.380x540x205
Interior measurements (HxWxD) mm.	1.250x200x145	1.250x240x175	1.190x310x165	1.190x360x165	1.190x530x165
Weight	15,7 kg.	20,2 kg.	31,2 kg.	34,2 kg.	37,5 kg.
Volume	30 L.	52,5 L.	65 L.	75,6 L.	105 L.
Thickness (front / casing) mm.	2 / 2	2 / 2	2 / 2	2 / 2	2 / 2
Drawer	x	x	✓	✓	✓
Bolts/diameter (mm.)	3/ø10	2/ø18	2/ø18	2/ø18	2/ø18
Bolts position					
EAN13 code	* 735237	* 735244	* 735251	* 735268	* 735398
Packaging measurement (HxWxD) mm.	1300x210x165	1300x250x220	1425x320x220	1425x375x220	1425x545x220

**GUN SAFE**  
Ref. ARM030325



**GUN SAFE**  
Ref. ARM070335



Rubber shelf for rifles.



Gun shelf inside the door (ref. ARM020325)



Drawer and box for objects.



FRONTAL THICKNESS

## GOLDEN RANGE




2-3 mm.



### TECHNICAL SPECIFICATION

Type of lock	6 asymmetric double bitted with double blade key.
EAN13 code	<b>8425181</b> *
EXTRA	
<ul style="list-style-type: none"> <li>• Drawer with key.</li> <li>• The ref. ARM054335 gun rack has inner coating and pockets inside the door.</li> </ul>	

**GUN SAFE**  
Ref. ARM054335



CHARACTERISTIC	SECURITY	CONFORT	LONG
Nº GUNS	5	5	5
Reference	ARM052335	ARM054335	ARM056345
Opening	Key	Key	Key
Exterior measurements (HxWxD)	1.380x315x225 mm.	1.380x315x225 mm.	1.450x315x225 mm.
Interior measurements (HxWxD)	1.190x305x160 mm.	1.190x305x150 mm.	1.260x305x160 mm.
Weight	44 kg.	37 kg.	46 kg.
Volume	58 L.	54 L.	61,5 L.
Thickness (front / casing)	3 / 3	3 / 2	3 / 2
Drawer	✓	✓	✓
Bolts/diameter	4/ø18 mm.	2/ø18 mm.	2/ø18 mm.
Bolts position			
EAN13 code	* 735404	* 735411	* 735428
Packaging measurement (HxWxD) mm.	1.425x320x220	1.425x320x220	1.495x320x220

## GOLDEN SECURITY

### TECHNICAL SPECIFICATION ARM052335

EXTRA

- Greater front and body thickness: 3 mm.
- Top, bottom and front closure with 4 bolts 18 mm Ø for increased safety.
- Drawer with key.
- Shelf for weapons made of rubber.
- Laser cutting



4 bolts 18 mm Ø.



Drawer with key.



Laser cutting.

## GOLDEN CONFORT

### TECHNICAL SPECIFICATION ARM054335

EXTRA

- Internal coating.
- Pockets inside the door.
- Drawer with key.
- Shelf for weapons made of rubber.



Drawer with key.



Internal coating and pockets inside the door.

## GOLDEN LONG

### TECHNICAL SPECIFICATION ARM056345

EXTRA

- Greater height (1.45m)..
- Drawer with key.
- Shelf for weapons made of rubber.



Drawer with key.



2 bolts 18 mm Ø.

FRONTAL THICKNESS

2 mm.

## WOOD GUN SAFE




### TECHNICAL SPECIFICATION

Type of lock	6 asymmetric double bitted with double blade key.
Materials	Wooden finish steel.
EAN13 code	<b>8425181</b> *
EXTRA	<ul style="list-style-type: none"> <li>• Shelf for 5 weapons made of rubber.</li> <li>• Drawer with key.</li> </ul>



Nº GUNS	5
Reference	ARM058335
Opening	Key
Exterior measurements (HxWxD)	1380x315x205 mm.
Interior measurements (HxWxD)	1.200x310x165 mm.
Weight	31,2 kg.
Volume	65 L.
Thickness (front / casing)	2 mm.
Drawer	✓
Bolts/diameter	2/ø18 mm.
Bolts position	
EAN13 code	* 735435
Packaging measurement (HxWxD)	1.425x320x220 mm.

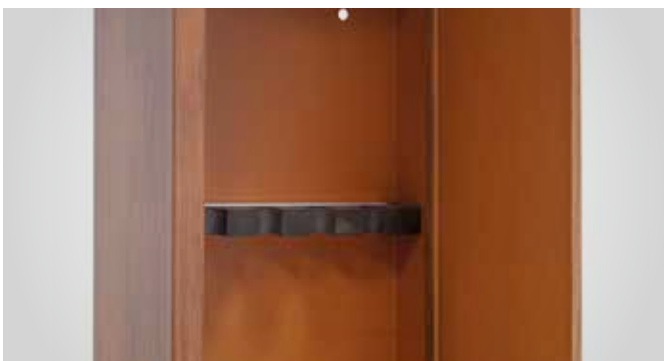

Shelves for weapons made of rubber.



Internal drawer with key.

## POINTER GUN SAFE

FRONTAL THICKNESS

2 mm.



Ref. ARM061350



### TECHNICAL SPECIFICATION

Type of lock:	6 asymmetric double bitted with double blade key.
EXTRA	<ul style="list-style-type: none"> <li>Shelves for 6 weapons made of rubber.</li> <li>Support platform with carpet.</li> <li>Drawer with key.</li> <li>3 side compartments.</li> </ul>
EAN13 code	8019635 *

<b>N° GUNS</b>	<b>6</b>
Reference	ARM061350
Opening	Key
Exterior measurements (HxWxD)	1.500x540x280 mm.
Interior measurements (HxWxD)	1.325x185+345x225 mm.
Weight	57 kg.
Volume	103 L.
Thickness (front / casing)	2 mm
Drawer	✓
Bolts/diameter	5/ø22 mm.
Bolts position	
EAN13 code	* 820602
Packaging measurement (HxWxD)	1.545x545x295 mm.



## CPP01



### TECHNICAL SPECIFICATION

Material	<ul style="list-style-type: none"> <li>Aluminum frame with ABS wavy coating.</li> <li>Ergonomic rubber cable.</li> </ul>
Opening	Combination lock.
EXTRA	Interior coated with EVA, internal filling with anti-shock and anti-wear sponge.
EAN13 code	8019635 *

OPENING	COMBINATION LOCK
Reference	CPP01
Exterior measurements (HxWxD)	304x100x194 mm.
Interior measurements (HxWxD)	304x100x194 mm.
Weight	1 kg.
EAN13 code	* 650018
Packaging measurement (HxWxD)	304x100x194 mm.

Ref. CPP01



Opening system: Combination lock.



**ARREGUI ESPAÑA:**

Polígono Ind. Ubegun 3B  
20810 Orio (Guipúzcoa)  
+34 943 833 700  
+34 943 834 556  
arregui@arregui.es



**ARREGUI DOMUS:**

Vía M.S. Ottone 1  
42041 Brescello (RE)  
+05 221 520 048  
+05 221 520 050  
arregui@arregui.it